


405A

CROSS-WALK BRICK PAVER PAVEMENT DETAIL  
NTS

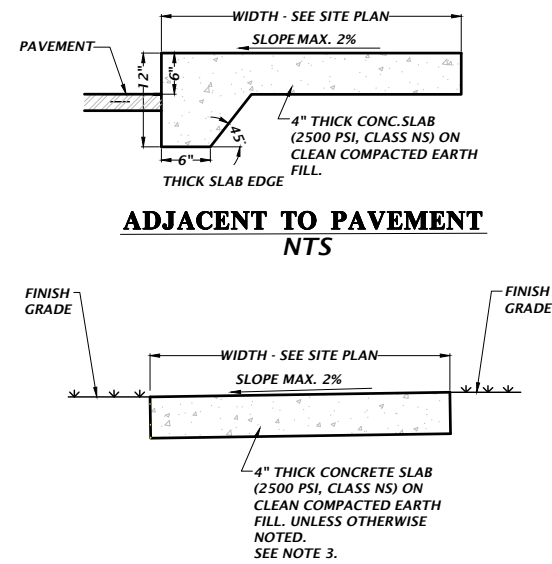

ADJACENT TO PAVEMENT  
NTS


NOT ADJACENT TO PAVEMENT  
NTS

NOTE(S):

1. SAWCUT CONTROL JOINTS SHALL BE CONSTRUCTED 5 FEET ON CENTER
2. EXPANSION JOINTS WITH PREFORMED JOINT FILLER SHALL BE CONSTRUCTED BETWEEN ALL FIXED OBJECTS AND WALK AND AT CONSTRUCTION JOINTS.
3. WITHIN ALL UTILITY EASEMENTS, CONCRETE SLAB SHALL BE 6" THICK.



405B

CONCRETE SIDEWALK DETAILS  
NTS

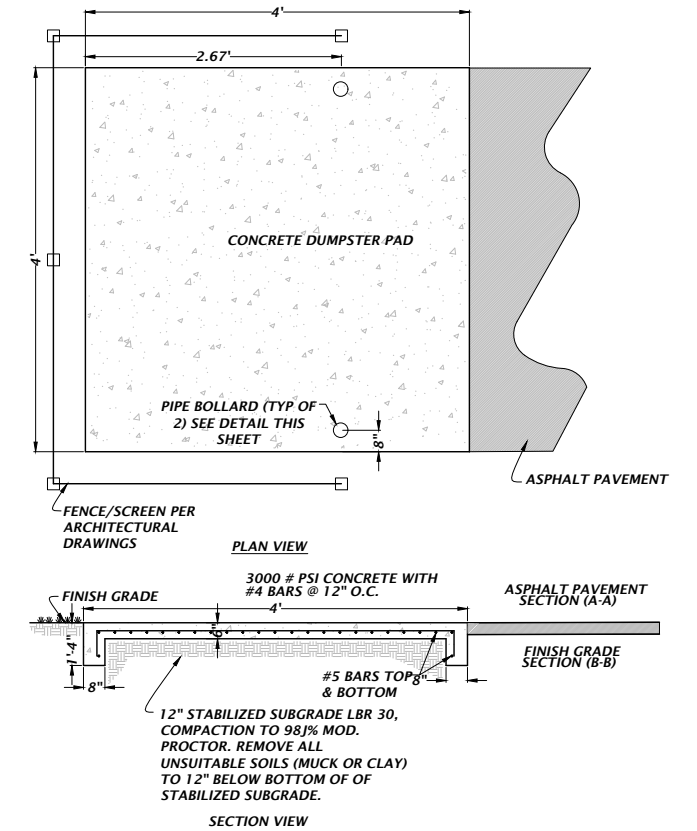



405C

CONCRETE DUMPSTER PAD  
NTS

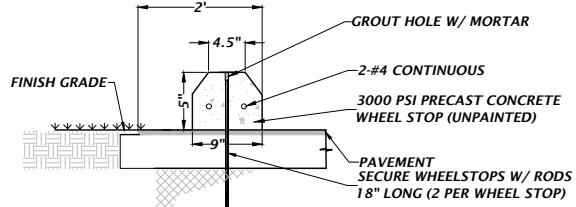


405D

WHEEL STOP  
NTS

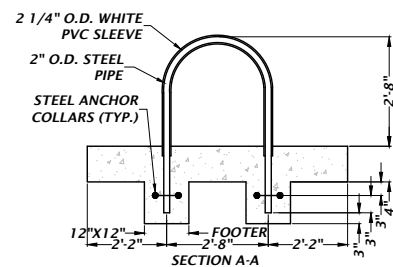

405E

U-SHAPE BIKE RACK  
NTS

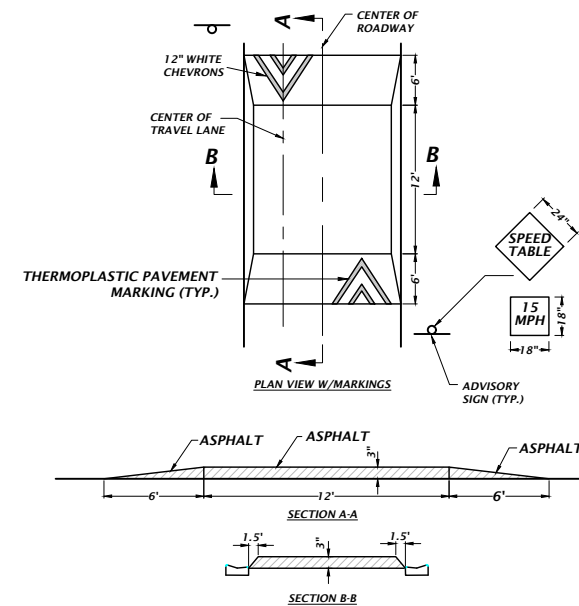

405F

SPEED TABLE  
NTS