


## ADJACENT TO PAVEMENT NTS

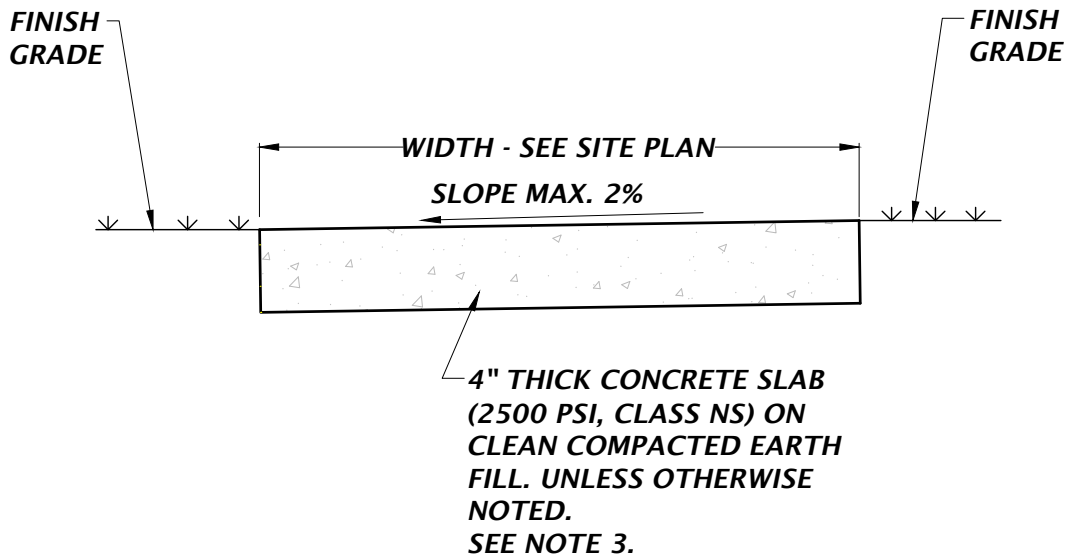

## NOT ADJACENT TO PAVEMENT NTS

**NOTE(S):**

1. SAWCUT CONTROL JOINTS SHALL BE CONSTRUCTED 5 FEET ON CENTER
2. EXPANSION JOINTS WITH PREFORMED JOINT FILLER SHALL BE CONSTRUCTED BETWEEN ALL FIXED OBJECTS AND WALK AND AT CONSTRUCTION JOINTS.
3. WITHIN ALL UTILITY EASEMENTS, CONCRETE SLAB SHALL BE 6" THICK.

**405B**

**CONCRETE SIDEWALK DETAILS**  
**NTS**

