


1.5" TYPE SP-9.5
ASPHALTIC CONCRETE
6" LIMEROCK BASE
MIN. LBR 100 COMPACTION 98%
AASHTO T-180

12" STABILIZED TYPE B SUBGRADE
MIN. LBR 40 COMPACTION 98%
AASHTO T-180


STANDARD DUTY ASPHALT, TYPE 1

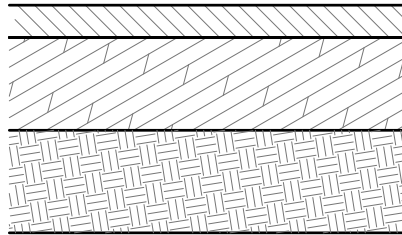

1.5" TYPE SP-12.5
ASPHALTIC CONCRETE
6" LIMEROCK BASE
MIN. LBR 100 COMPACTION 98%
AASHTO T-180

12" STABILIZED TYPE B SUBGRADE
MIN. LBR 40 COMPACTION 98%
AASHTO T-180

STANDARD DUTY ASPHALT, TYPE 2

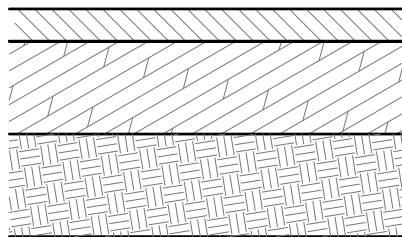

2" TYPE SP-12.5
ASPHALTIC CONCRETE
8" LIMEROCK BASE
MIN. LBR 100 COMPACTION 98%
AASHTO T-180

12" STABILIZED TYPE B SUBGRADE
MIN. LBR 40 COMPACTION 98%
AASHTO T-180

HEAVY DUTY ASPHALT

406A

ASPHALT PAVEMENT DETAILS
NTS

