


**PLAN VIEW SHOWING TYPICAL PLACEMENT AT
TEMPORARY UNDERGROUND SERVICE**

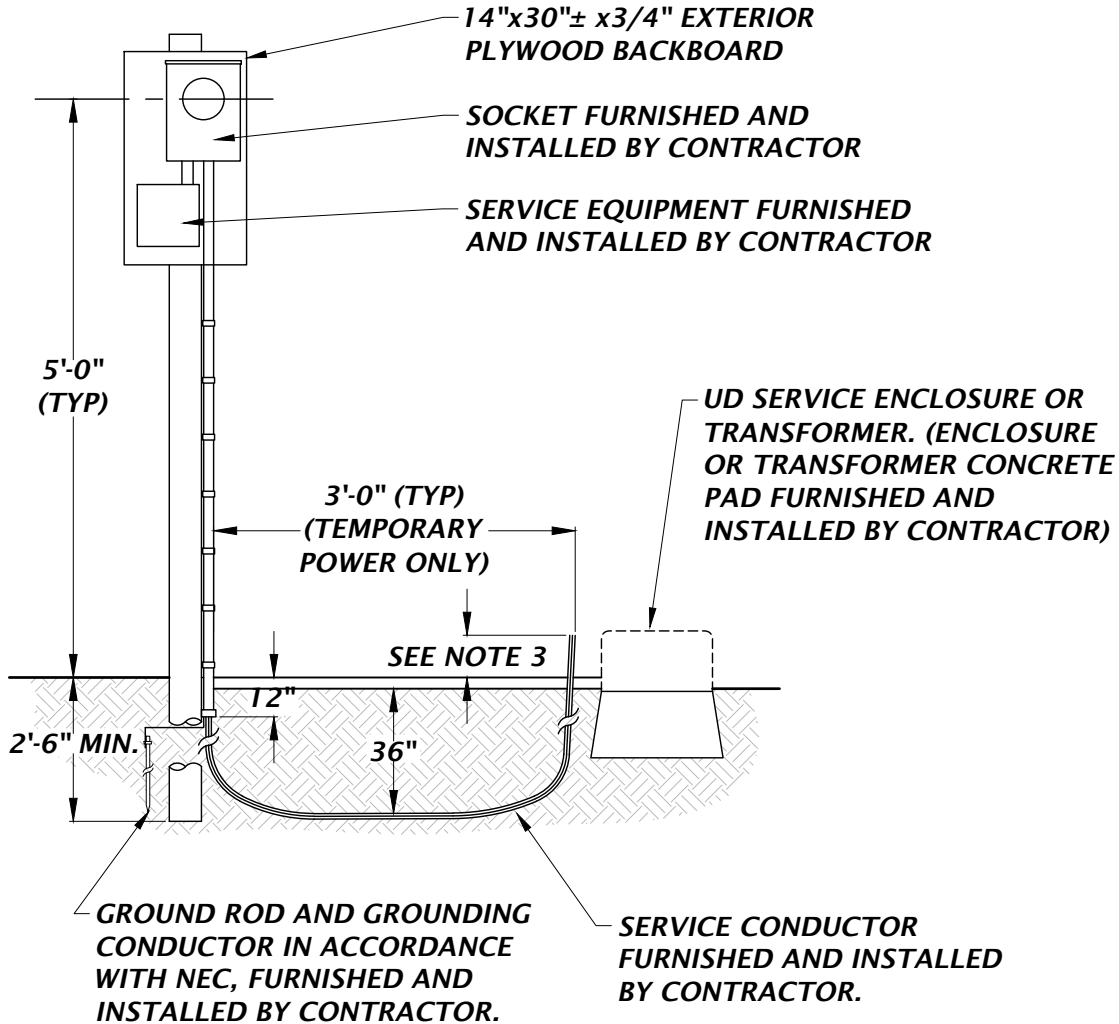

NOTES:

1. POLE SHALL NOT BE LOCATED IN RIGHT-OF-WAY
2. MOUNTING POLE SHALL BE PRESSURE TREATED 4"x4"x8'-0" MIN.
3. EXTEND SERVICE 3'-0" ABOVE FINISHED GRADE.
4. UNDERGROUND DISTRIBUTION = UD
5. PROPERTY LINE = P/L

551

**TYPICAL UNDERGROUND TEMPORARY
SERVICE INSTALLATION**

NTS

